


MDCA Series




FEATURES

-
-
-
-
-
-

APPLICATION


-
-
-
-
-
-

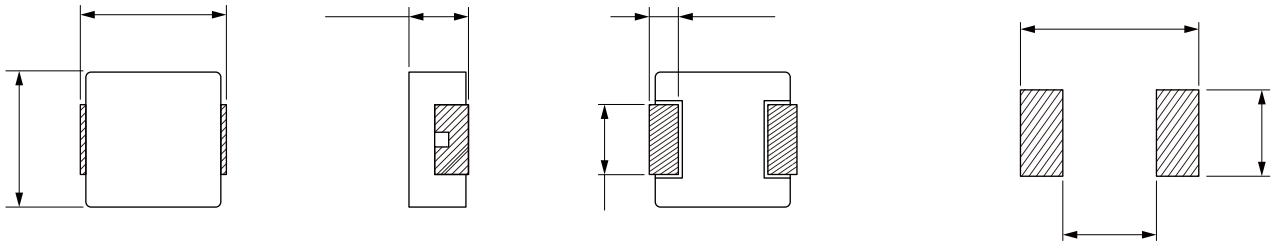

Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)
MDCA6020-R10N		$\pm 30\%$				
		$\pm 30\%$				
MDCA6020-R22N		$\pm 30\%$				
MDCA6020-R33M		$\pm 20\%$				
MDCA6020-R47M		$\pm 20\%$				
		$\pm 20\%$				
MDCA6020-R68M		$\pm 20\%$				
MDCA6020-1R0M		$\pm 20\%$				
		$\pm 20\%$				
MDCA6020-2R2M		$\pm 20\%$				
MDCA6020-3R3M		$\pm 20\%$				
MDCA6020-4R7M		$\pm 20\%$				
		$\pm 20\%$				
MDCA6020-6R8M		$\pm 20\%$				
MDCA6020-8R2M		$\pm 20\%$			101	116

Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)
MDCA6020-100M		$\pm 20\%$			134	
		$\pm 20\%$			190	210
MDCA6020-220M		$\pm 20\%$			236	280



△

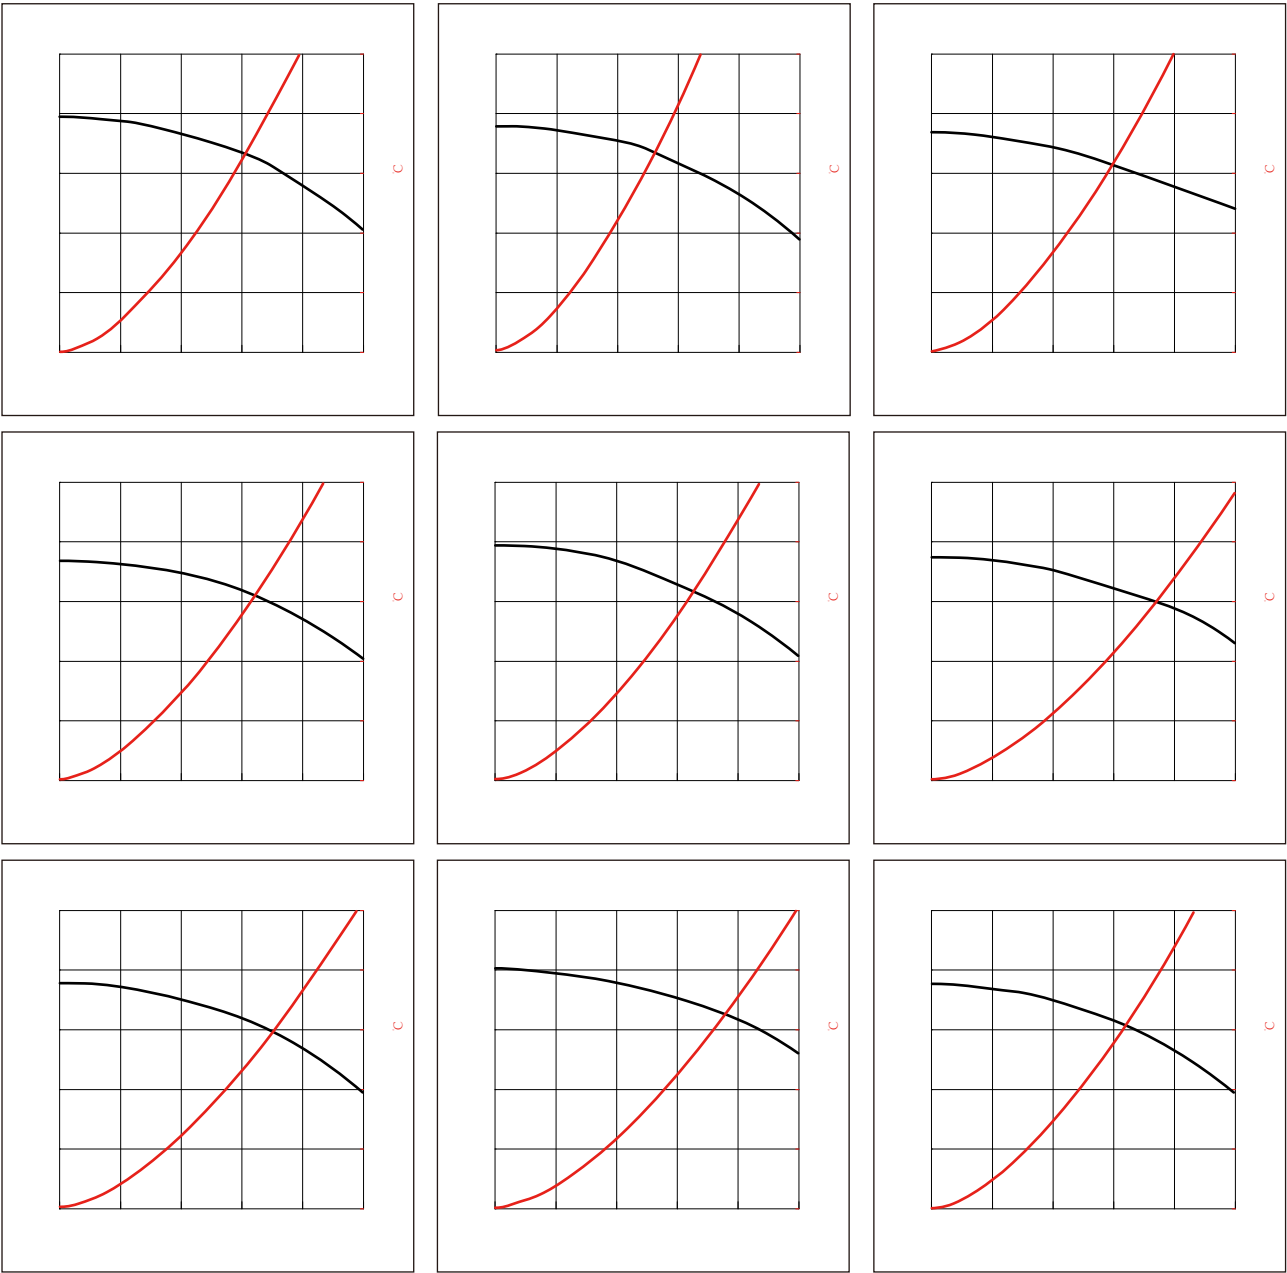


A 5x5 grid of squares, with a red 'C' label to its right.

c

A 5x5 grid of squares, with a red 'C' label to its right.

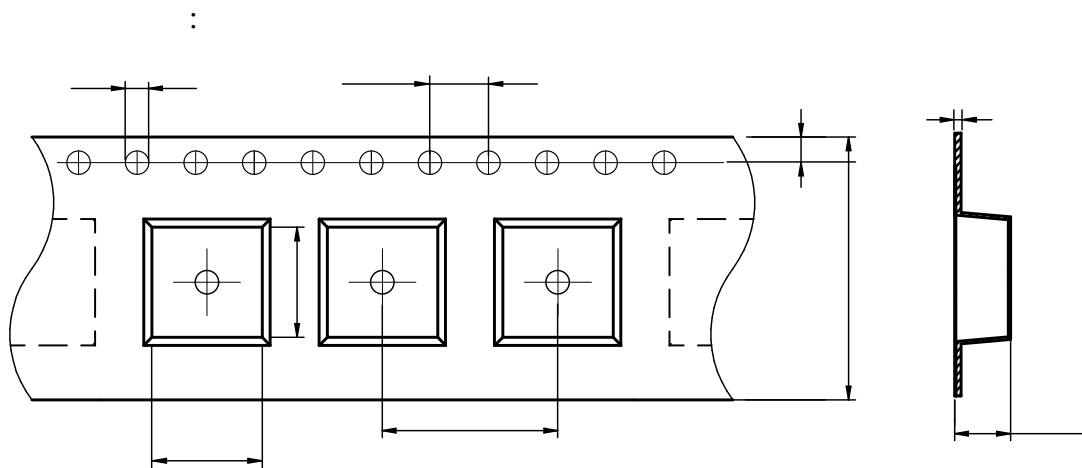
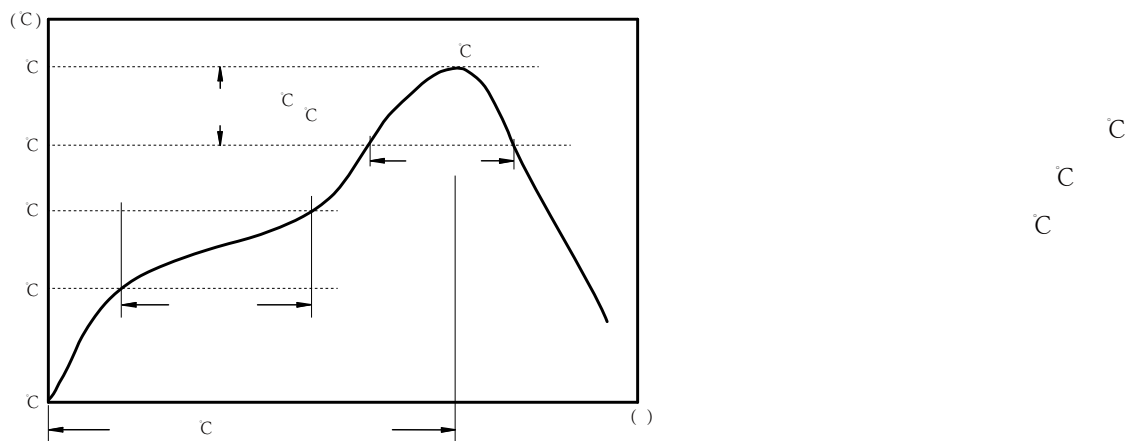


MDCA6020	7.0 ± 0.1	7.7 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	2.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

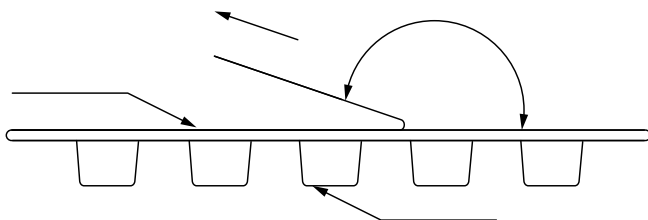


The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	Printing Inductance+period)
---------	-----------------------------

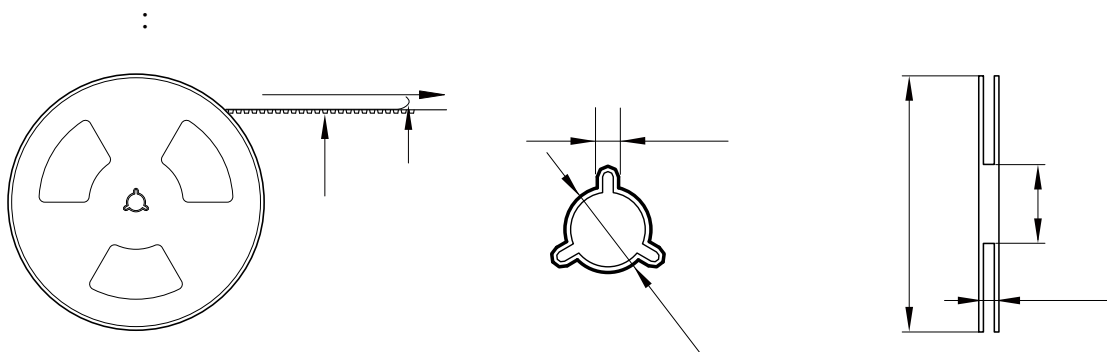

1500 Pcs/Reel



2 Reel /Inner box(3000 Pcs)



3 Inner box/Carton box(9K Pcs)

:

•

•

•

•

•

•

•

•